



MJ775



77,30 m




400 kg



360°




75,30 m



250/380x90x110 cm



EX
Stabilizzatori a estensione laterale idraulica
Stabs par vérins extensibles hydrauliquement
Laterally extensible hydraulic stabilizers
H-Abstützung



33,0 m (400 kg)
35,8 m (280 kg)
38,0 m (120 kg)





90°+90°
+ rotazione JIB2 +-180°



48 ton




MULTITEL MJ775

Codice			1D68204			
Ente	Rev.	Descrizione	Data	Dis.	Contr.	Ap.AQ
MRK	0	EMISSIONE	30/01/19	L.B.	S.G.	F.F.
DIAGRAMMA - SCHEDA 54/2 - Rev. 0 - 15/12/00						

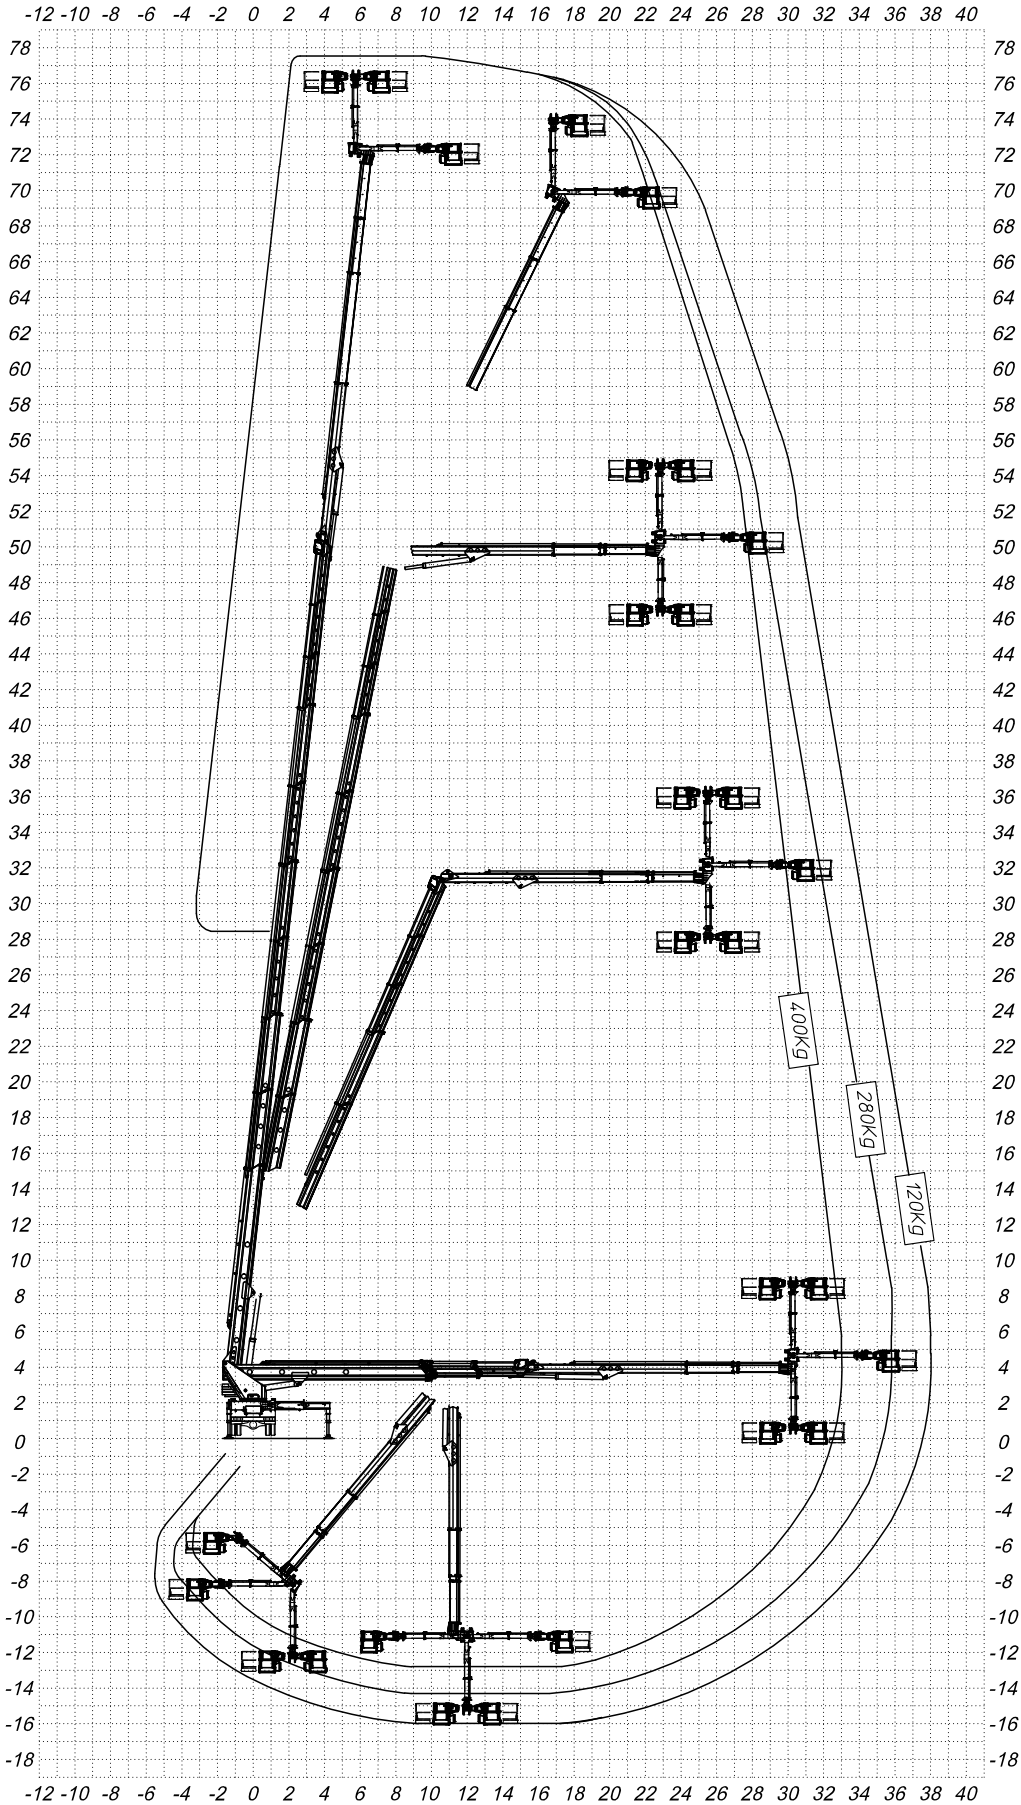




MULTITEL MJ775

Codice			1D68207			
Ente	Rev.	Descrizione	Data	Dis.	Contr.	Ap.AQ
MRK	0	EMISSIONE	30/01/19	L.B.	S.G.	F.F.
DIAGRAMMA - SCHEDA 54/2 - Rev. 0 - 15/12/00						

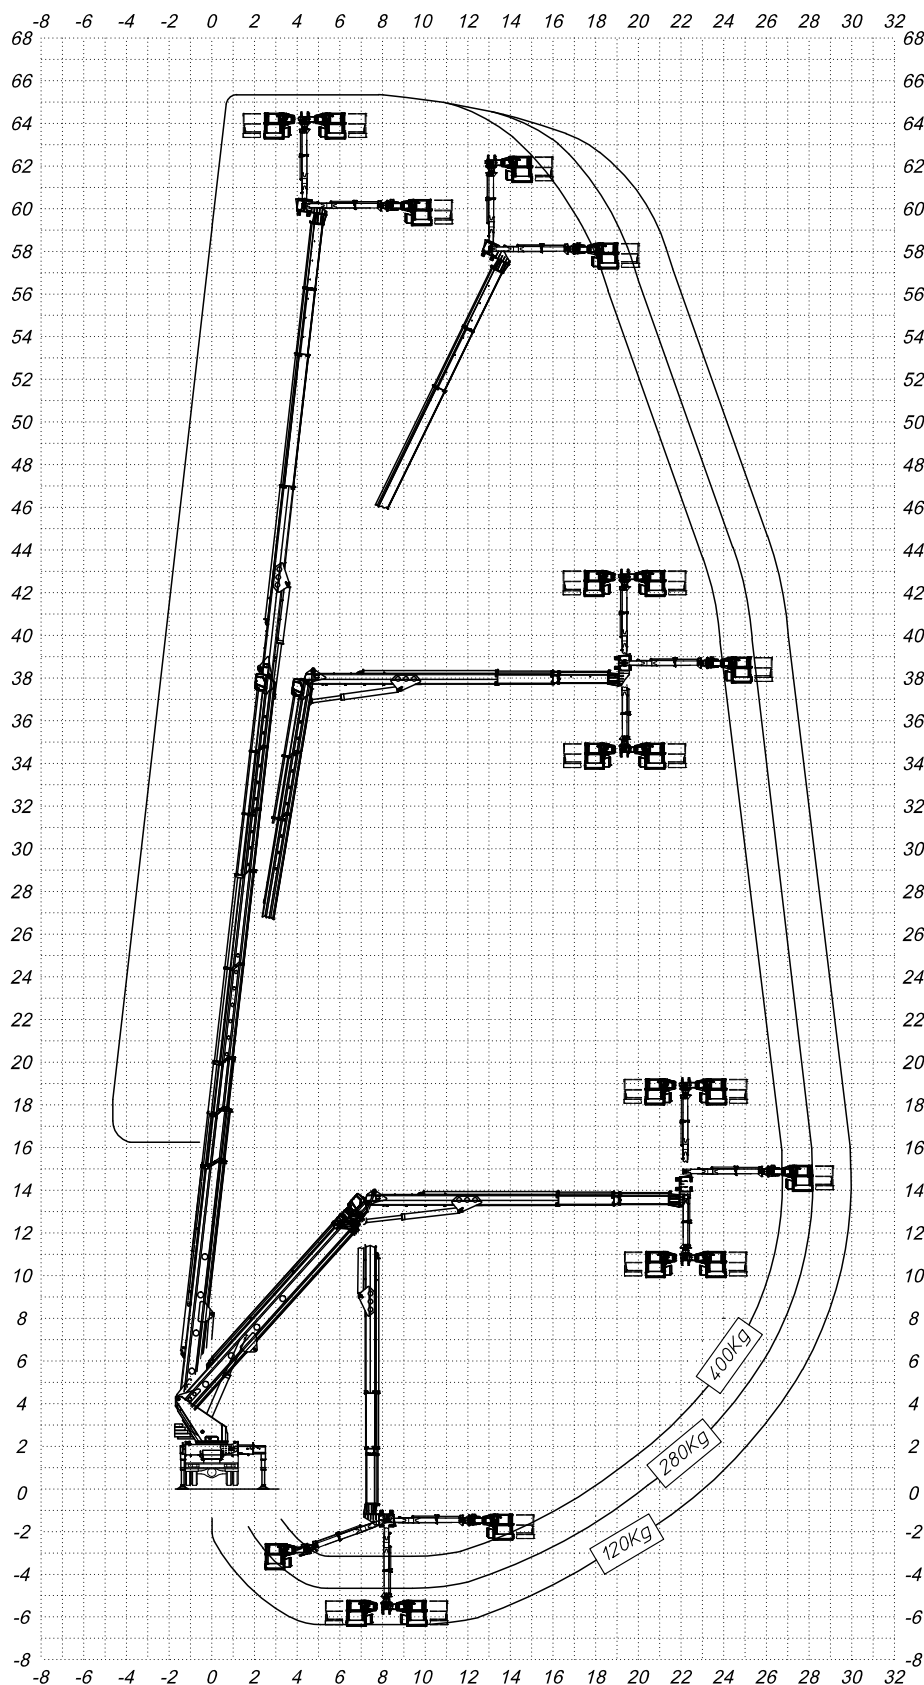


MULTITEL MJ775

Codice			1D68211			
Ente	Rev.	Descrizione	Data	Dis.	Contr.	Ap.AQ
MRK	0	EMISSIONE	30/01/19	L.B.	S.G.	F.F.
DIAGRAMMA - SCHEDA 54/2 - Rev. 0 - 15/12/00						

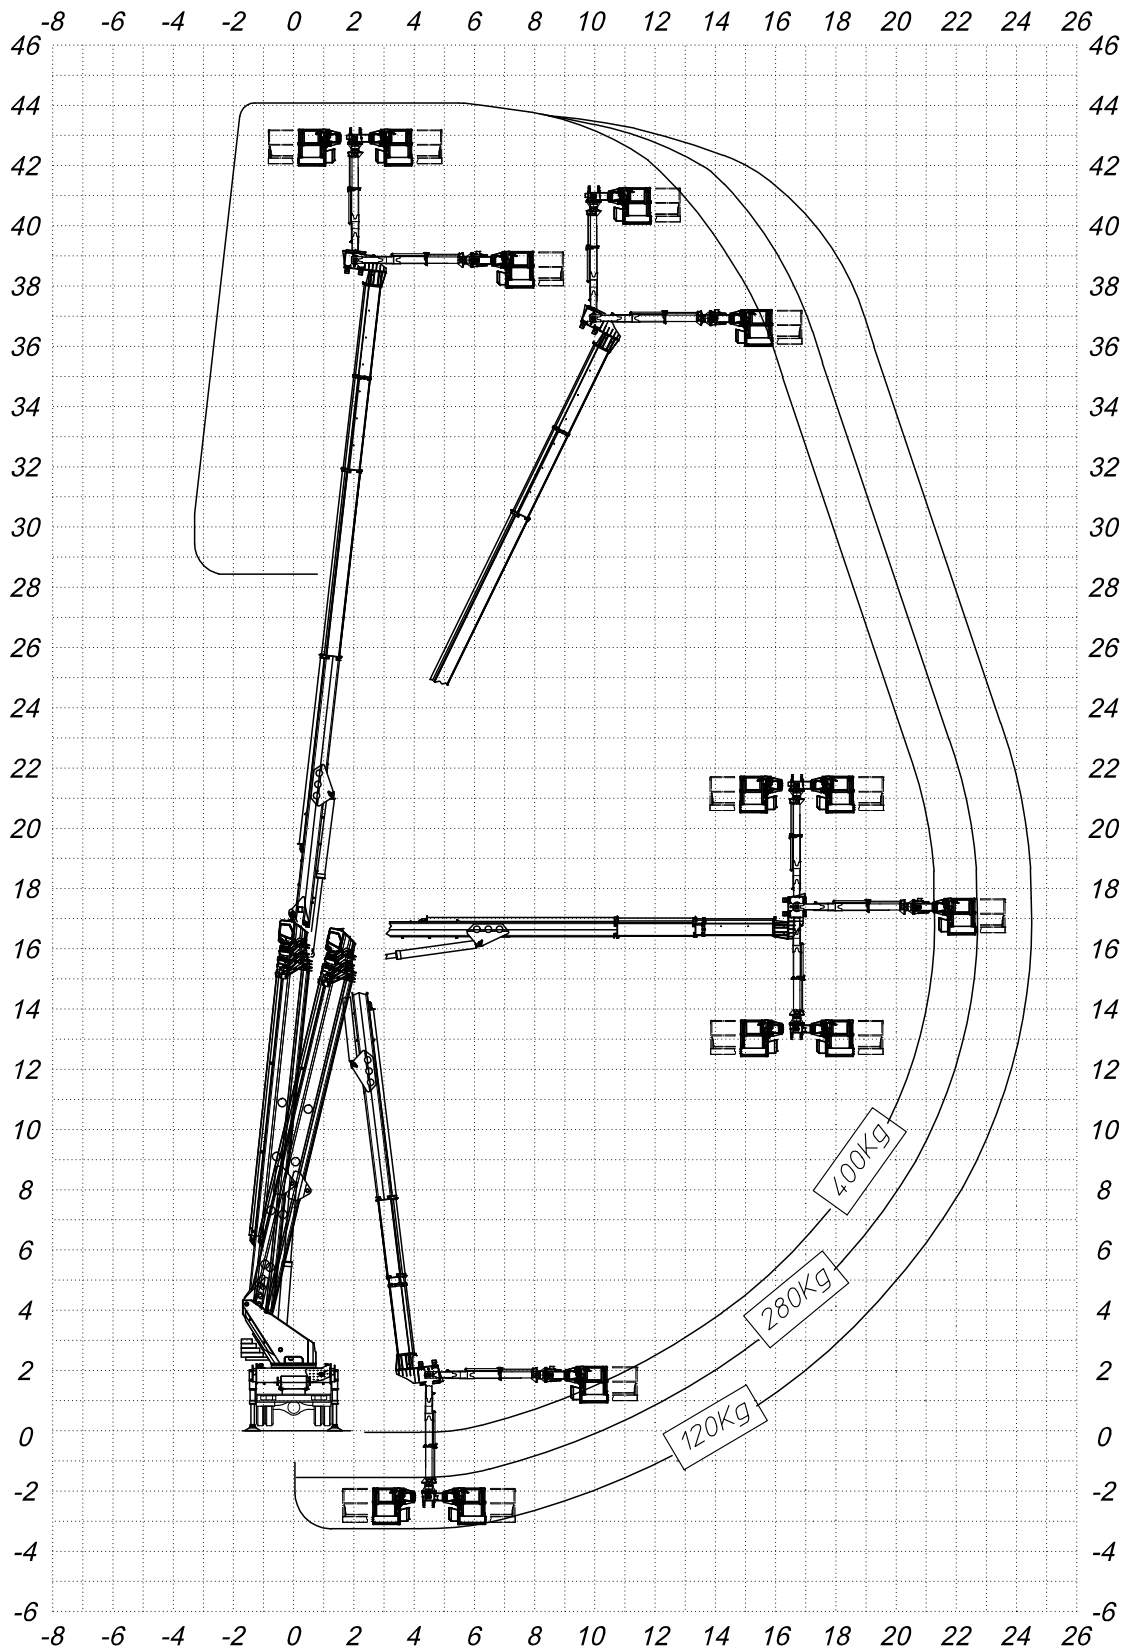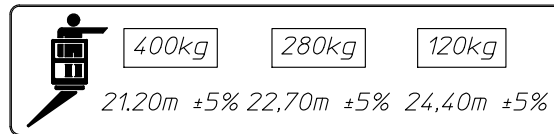



MULTITEL MJ 775
su Scania B10X4*6NB PTT= 48000 kg

Codice			1D87363			
Ente	Rev.	Descrizione	Data	Dis.	Contr.	Ap.AQ
MRK	0	EMISSIONE	07/07/23	L.P.	---	----
INGOMBRO - SCHEDA 54/1 - Rev. 0 - 15/12/00						

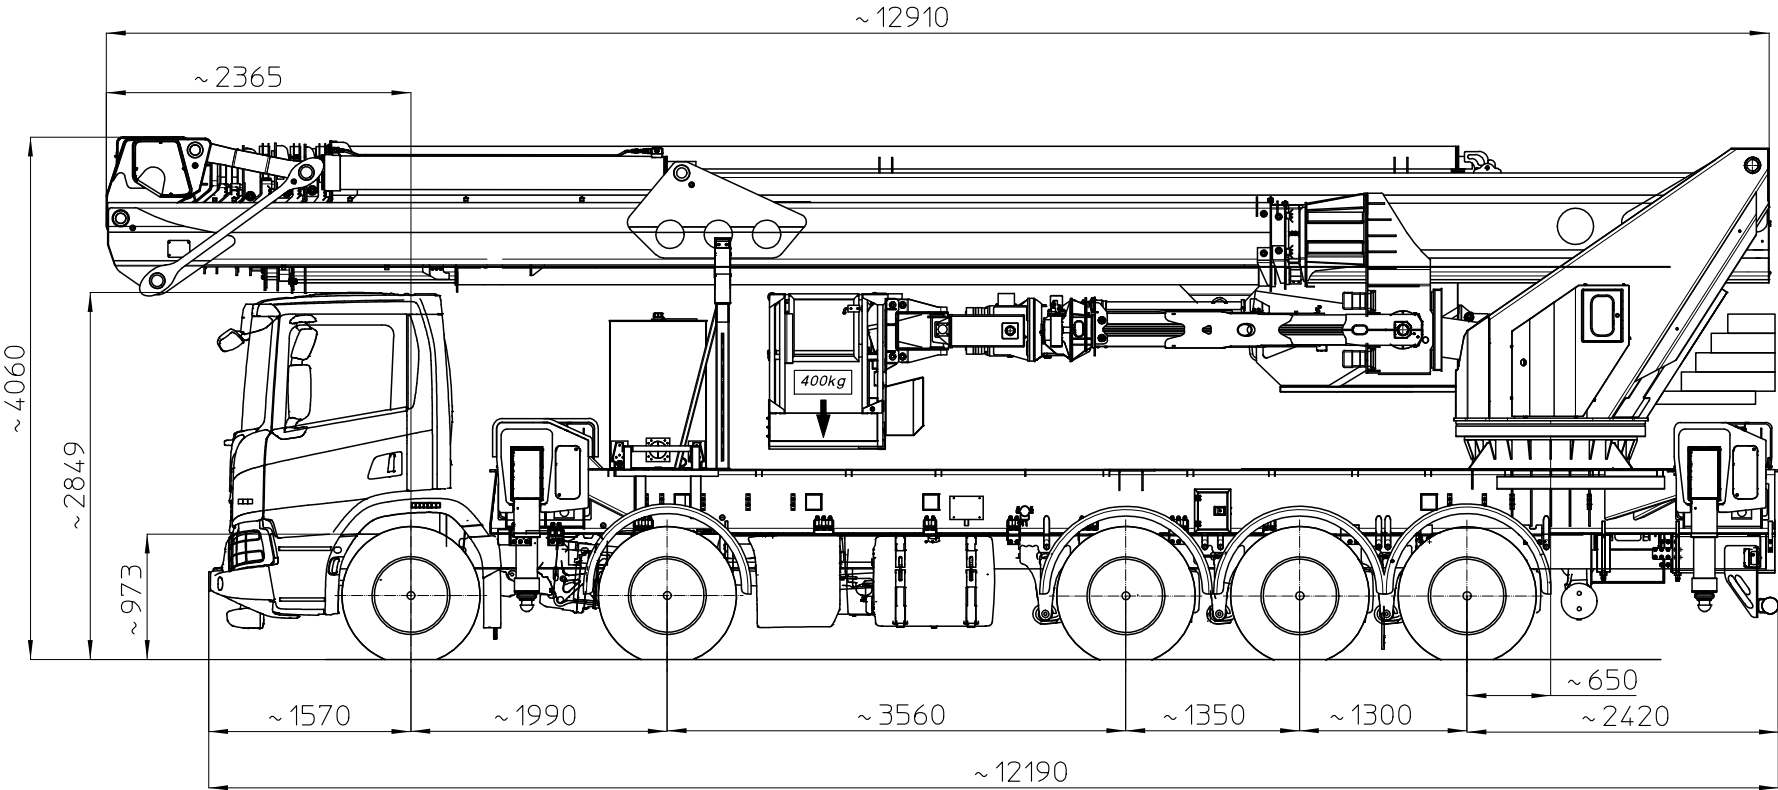

VEHICLE DATA			
axle weight	[kg]		TON
	front	rear	
unladen	6900	5724	48,00
max permissible	20000	33000	

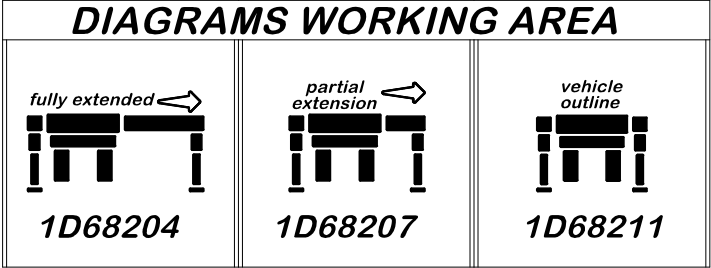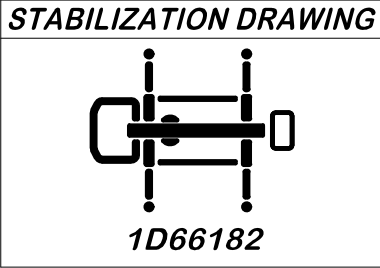

I - Le quote riportate in disegno sono indicative, possono subire variazioni in base alle dimensioni dell'autocarro.

F - Les cotes indiquée dans le dessin sont indicatives et peuvent subir des variations selon aux dimensions du porteur.

E - The dimensions shown in the drawing are an indication and may undergo changes related to the truck sizes.

D - Die in der Zeichnung angegebene Maße sind Richtwerte und können je nach Fahrzeuggröße variieren.